

CSD19538Q2 100V N-Channel NexFET™ Power MOSFET

1 Features


- Ultra-low Q_g and Q_{gd}
- Low-thermal resistance
- Avalanche rated
- Lead free
- RoHS compliant
- Halogen free
- SON 2mm × 2mm plastic package

2 Applications

- Power over ethernet (PoE)
- Power sourcing equipment (PSE)
- Motor control


Description

This 100V, 49mΩ, SON 2mm × 2mm NexFET™ power MOSFET is designed to minimize losses in power conversion applications.

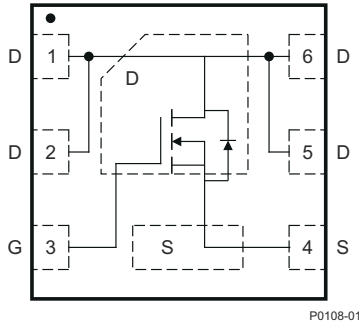

P0108-01

Figure 3-1. Top View

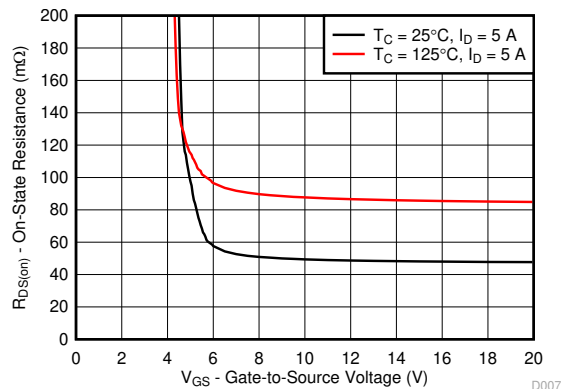

D007

$R_{DS(on)}$ vs V_{GS}

Product Summary

$T_A = 25^\circ\text{C}$		TYPICAL VALUE	UNIT
V_{DS}	Drain-to-Source Voltage	100	V
Q_g	Gate Charge Total (10V)	4.3	nC
Q_{gd}	Gate Charge Gate-to-Drain	0.8	nC
$R_{DS(on)}$	Drain-to-Source On Resistance	$V_{GS} = 6\text{V}$	58
		$V_{GS} = 10\text{V}$	49
$V_{GS(th)}$	Threshold Voltage	3.2	V

Device Information⁽¹⁾


DEVICE	QTY	MEDIA	PACKAGE	SHIP
CSD19538Q2	3000	7 Inch Reel	SON 2.00mm x 2.00mm Plastic Package	Tape and Reel
CSD19538Q2T	250			
CSD19538Q2R	10,000	13 Inch Reel		

- (1) For all available packages, see the orderable addendum at the end of the data sheet.

Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$		VALUE	UNIT
V_{DS}	Drain-to-Source Voltage	100	V
V_{GS}	Gate-to-Source Voltage	±20	V
I_D	Continuous Drain Current (Package Limited)	14.4	A
	Continuous Drain Current (Silicon Limited), $T_C = 25^\circ\text{C}$	13.1	
	Continuous Drain Current ⁽¹⁾	4.6	
I_{DM}	Pulsed Drain Current ⁽²⁾	34.4	A
P_D	Power Dissipation ⁽¹⁾	2.5	W
	Power Dissipation, $T_C = 25^\circ\text{C}$	20.2	
T_J , T_{stg}	Operating Junction Temperature, Storage Temperature	–55 to 150	°C
E_{AS}	Avalanche Energy, Single Pulse $I_D = 12.6\text{A}$, $L = 0.1\text{mH}$, $R_G = 25\Omega$	8	mJ

- (1) Typical $R_{\theta JA} = 50^\circ\text{C/W}$ on a 1 inch², 2oz Cu pad on a 0.06 inch thick FR4 PCB.
- (2) Max $R_{\theta JC} = 6.2^\circ\text{C/W}$, pulse duration ≤ 100μs, duty cycle ≤ 1%.

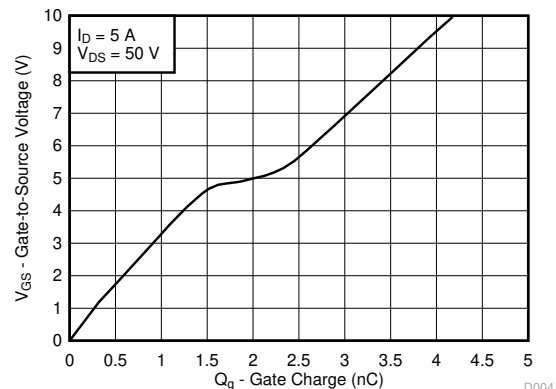

D004

Gate Charge



Table of Contents

1 Features	1	4.2 Receiving Notification of Documentation Updates.....	7
2 Applications	1	4.3 Support Resources.....	7
3 Specifications	3	4.4 Trademarks.....	7
3.1 Electrical Characteristics.....	3	4.5 Electrostatic Discharge Caution.....	7
3.2 Thermal Information.....	3	4.6 Glossary.....	7
3.3 Typical MOSFET Characteristics.....	4	5 Revision History	7
4 Device and Documentation Support	7	6 Mechanical, Packaging, and Orderable Information	8
4.1 Third-Party Products Disclaimer.....	7		

3 Specifications

3.1 Electrical Characteristics

$T_A = 25^\circ\text{C}$ (unless otherwise stated)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT	
STATIC CHARACTERISTICS							
BV _{DSS}	Drain-to-source voltage	V _{GS} = 0V, I _D = 250μA	100			V	
I _{DSS}	Drain-to-source leakage current	V _{GS} = 0V, V _{DS} = 80V	1			μA	
I _{GSS}	Gate-to-source leakage current	V _{DS} = 0V, V _{GS} = 20V	100			nA	
V _{GS(th)}	Gate-to-source threshold voltage	V _{DS} = V _{GS} , I _D = 250μA	2.8	3.2	3.8	V	
R _{DS(on)}	Drain-to-source on resistance	V _{GS} = 6V, I _D = 5A	58			mΩ	
		V _{GS} = 10V, I _D = 5A	49				
g _{fs}	Transconductance	V _{DS} = 10V, I _D = 5A	19			S	
DYNAMIC CHARACTERISTICS							
C _{iss}	Input capacitance	V _{GS} = 0V, V _{DS} = 50V, f = 1MHz	349			454	pF
C _{oss}	Output capacitance		69			90	pF
C _{rss}	Reverse transfer capacitance		12.6			16.4	pF
R _G	Series gate resistance		4.6			9.2	Ω
Q _g	Gate charge total (10V)	V _{DS} = 50V, I _D = 5A	4.3			5.6	nC
Q _{gd}	Gate charge gate-to-drain		0.8				nC
Q _{gs}	Gate charge gate-to-source		1.6				nC
Q _{g(th)}	Gate charge at V _{th}		1.0				nC
Q _{oss}	Output charge	V _{DS} = 50V, V _{GS} = 0V	12.3				nC
t _{d(on)}	Turnon delay time	V _{DS} = 50V, V _{GS} = 10V, I _{DS} = 5A, R _G = 0Ω	5				ns
t _r	Rise time		3				ns
t _{d(off)}	Turnoff delay time		7				ns
t _f	Fall time		2				ns
DIODE CHARACTERISTICS							
V _{SD}	Diode forward voltage	I _{SD} = 5A, V _{GS} = 0V	0.85			1.0	V
Q _{rr}	Reverse recovery charge	V _{DS} = 50V, I _F = 5A,	94				nC
t _{rr}	Reverse recovery time	di/dt = 300A/μs	32				ns

3.2 Thermal Information


$T_A = 25^\circ\text{C}$ (unless otherwise stated)

THERMAL METRIC		MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-case thermal resistance ⁽¹⁾			6.2	$^\circ\text{C/W}$
$R_{\theta JA}$	Junction-to-ambient thermal resistance ^{(1) (2)}			65	$^\circ\text{C/W}$

- (1) $R_{\theta JC}$ is determined with the device mounted on a 1in² (6.45cm²), 2oz (0.071mm) thick Cu pad on a 1.5in × 1.5in (3.81cm × 3.81cm), 0.06in (1.52mm) thick FR4 PCB. $R_{\theta JC}$ is specified by design, whereas $R_{\theta JA}$ is determined by the user's board design.
- (2) Device mounted on FR4 material with 1in² (6.45cm²), 2oz (0.071mm) thick Cu.




Max $R_{\theta JA} = 65^{\circ}\text{C/W}$ when mounted on 1in^2 (6.45cm^2) of 2oz (0.071mm) thick Cu.



Max $R_{\theta JA} = 250^{\circ}\text{C/W}$ when mounted on a minimum pad area of 2oz (0.071mm) thick Cu.

3.3 Typical MOSFET Characteristics

$T_A = 25^{\circ}\text{C}$ (unless otherwise stated)

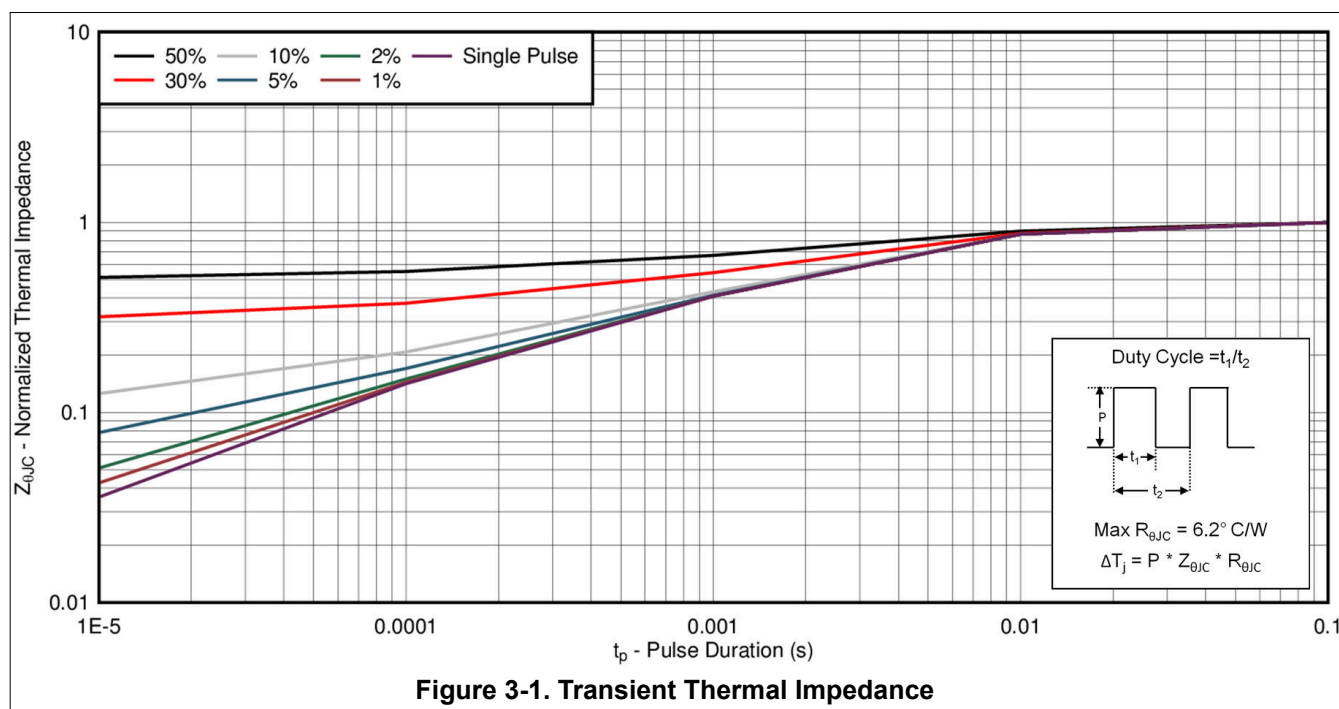

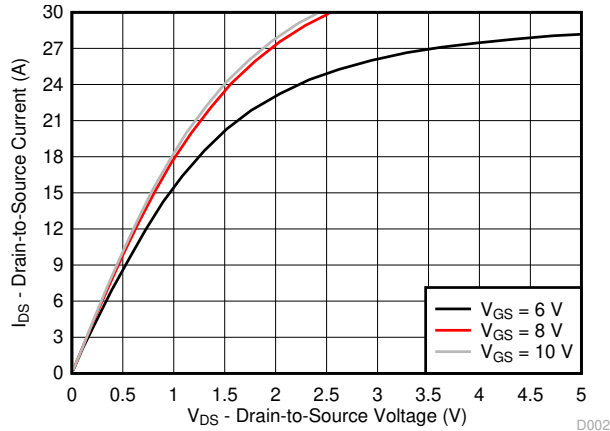


Figure 3-2. Saturation Characteristics

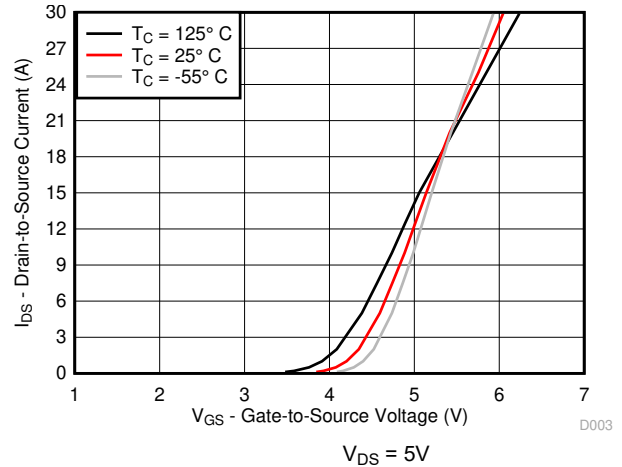


Figure 3-3. Transfer Characteristics

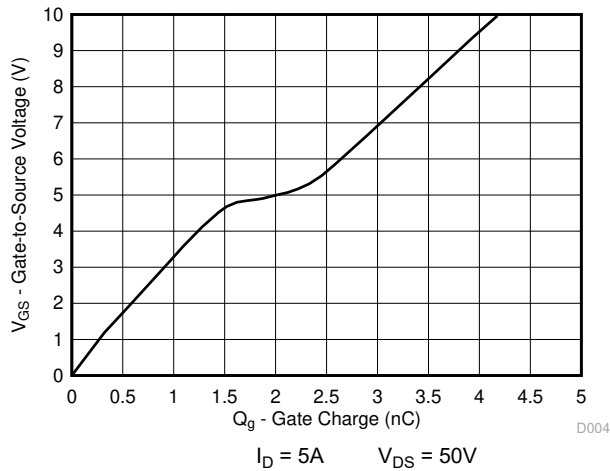


Figure 3-4. Gate Charge

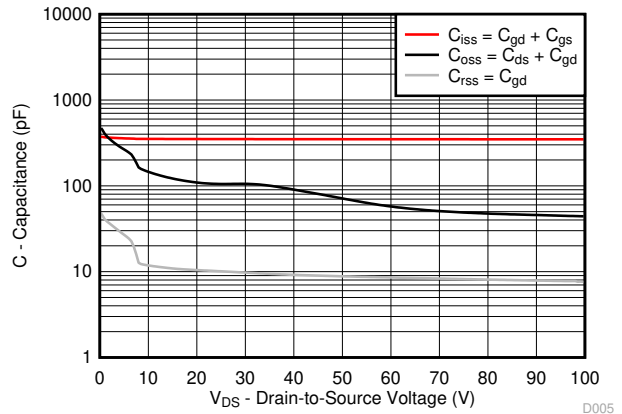


Figure 3-5. Capacitance

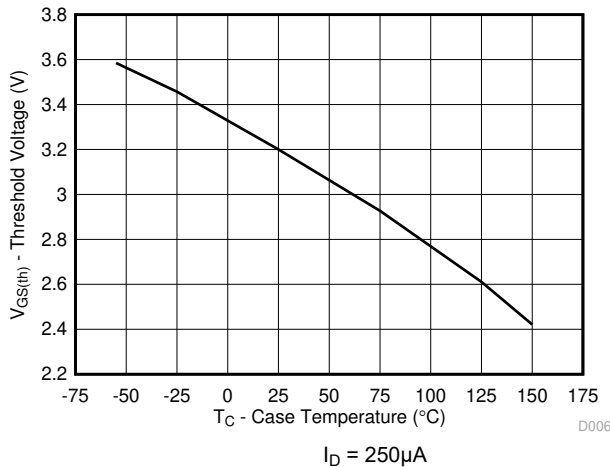


Figure 3-6. Threshold Voltage vs Temperature

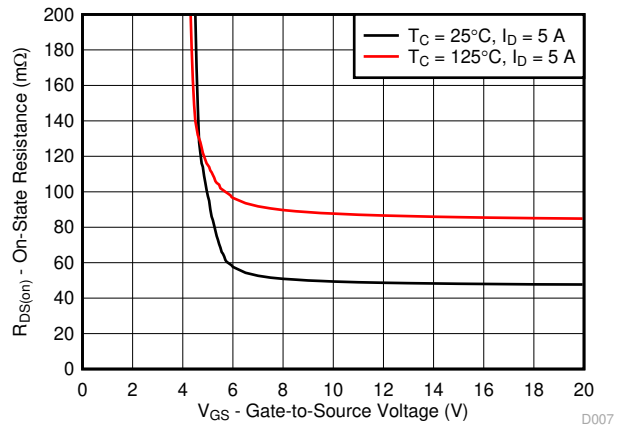


Figure 3-7. On-State Resistance vs Gate-to-Source Voltage

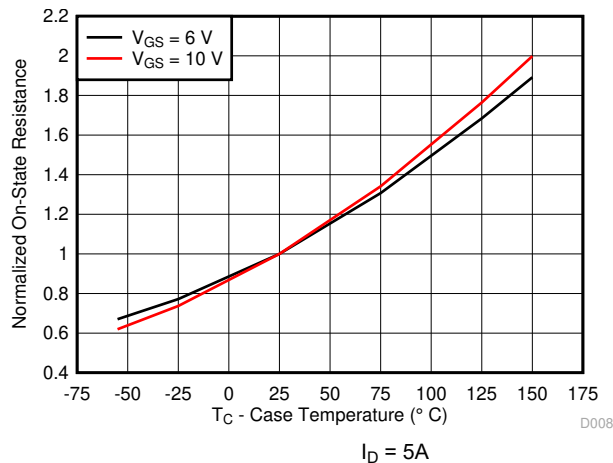


Figure 3-8. Normalized On-State Resistance vs Temperature

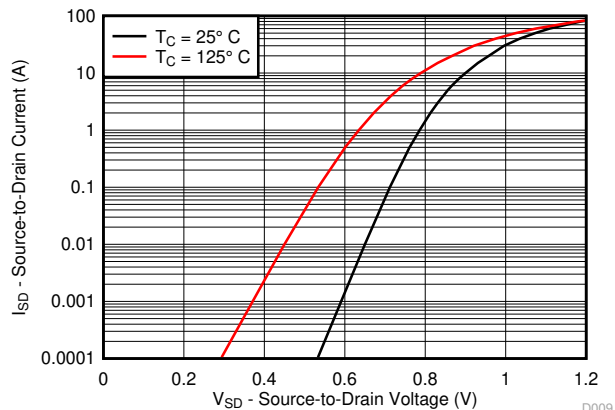


Figure 3-9. Typical Diode Forward Voltage

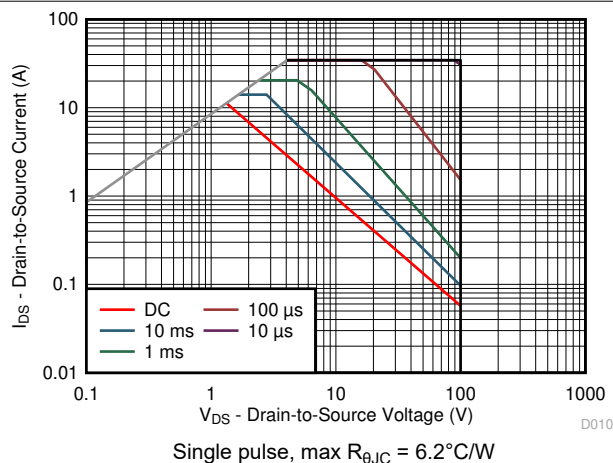


Figure 3-10. Maximum Safe Operating Area

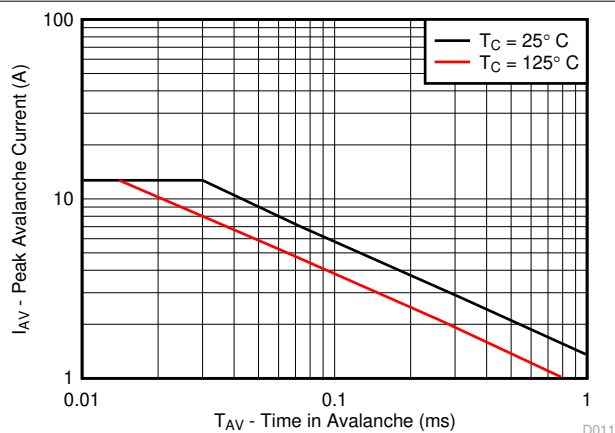


Figure 3-11. Single Pulse Unclamped Inductive Switching

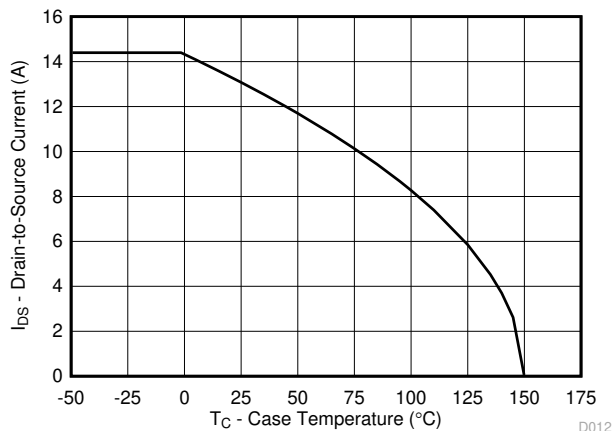


Figure 3-12. Maximum Drain Current vs Temperature

4 Device and Documentation Support

4.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

4.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

4.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

4.4 Trademarks

NexFET™ and TI E2E™ are trademarks of Texas Instruments.
All trademarks are the property of their respective owners.

4.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

4.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

5 Revision History

Changes from Revision A (January 2017) to Revision B (March 2024) Page

- Updated the numbering format for tables, figures, and cross-references throughout the document..... **1**

Changes from Revision * (July 2016) to Revision A (January 2017) Page

- Changed test voltage V_{DS} from 100V : to 50V in [Figure 3-2](#) curve..... **1**
- Changed test voltage V_{DS} from 100V : to 50V in [Figure 3-4](#) **4**

6 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
CSD19538Q2	Active	Production	WSON (DQK) 6	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1958
CSD19538Q2.B	Active	Production	WSON (DQK) 6	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1958
CSD19538Q2G4.B	Active	Production	WSON (DQK) 6	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1958
CSD19538Q2R	Active	Production	WSON (DQK) 6	10000 JUMBO T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1958
CSD19538Q2R.B	Active	Production	WSON (DQK) 6	10000 JUMBO T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1958
CSD19538Q2T	Active	Production	WSON (DQK) 6	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1958
CSD19538Q2T.B	Active	Production	WSON (DQK) 6	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1958

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CSD19538Q2	WSO	DQK	6	3000	180.0	9.5	2.3	2.3	1.0	4.0	8.0	Q1
CSD19538Q2T	WSO	DQK	6	250	180.0	9.5	2.3	2.3	1.0	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS

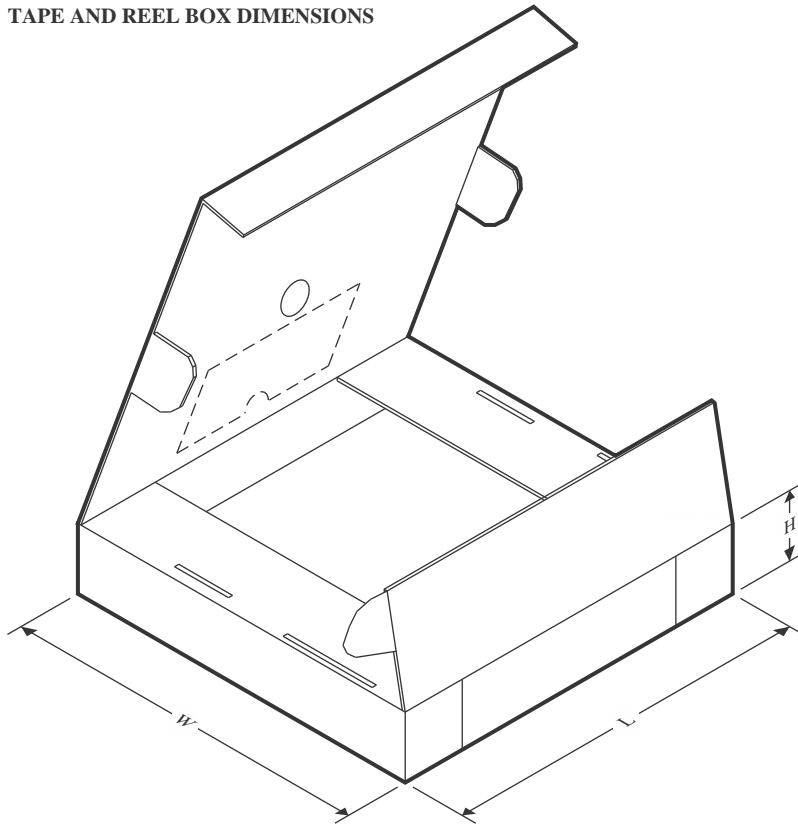

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CSD19538Q2	WSO	DQK	6	3000	189.0	185.0	36.0
CSD19538Q2T	WSO	DQK	6	250	189.0	185.0	36.0

GENERIC PACKAGE VIEW


DQK 6

WSON - 0.8 mm max height

2 x 2, 0.65 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD


This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

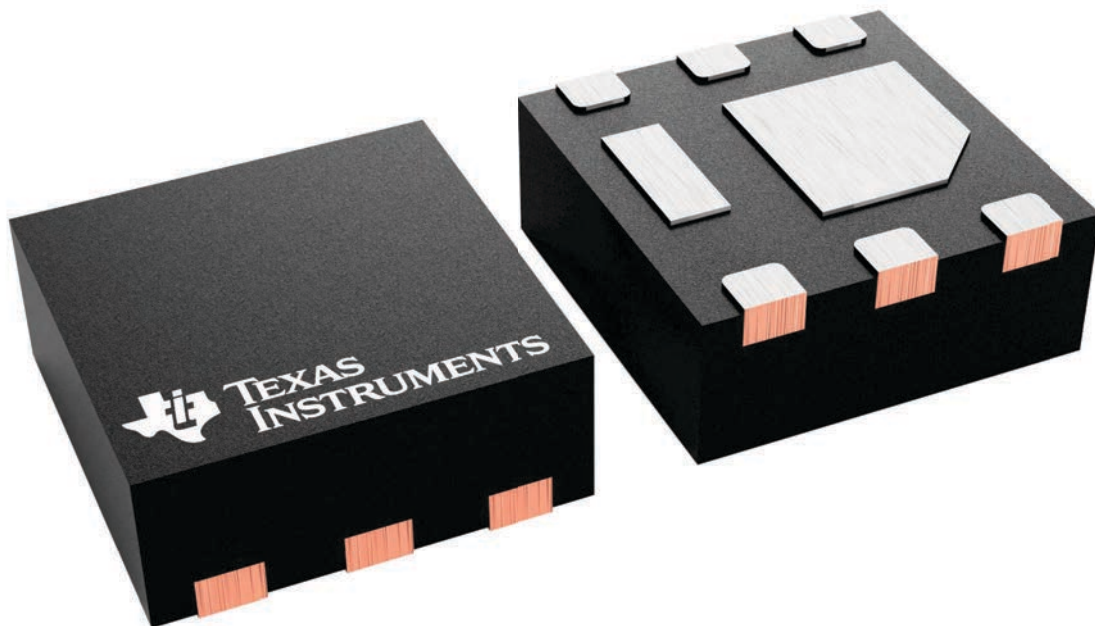


4229807/A

DQK (S-PWSON-N6)

PLASTIC SMALL OUTLINE NO-LEAD

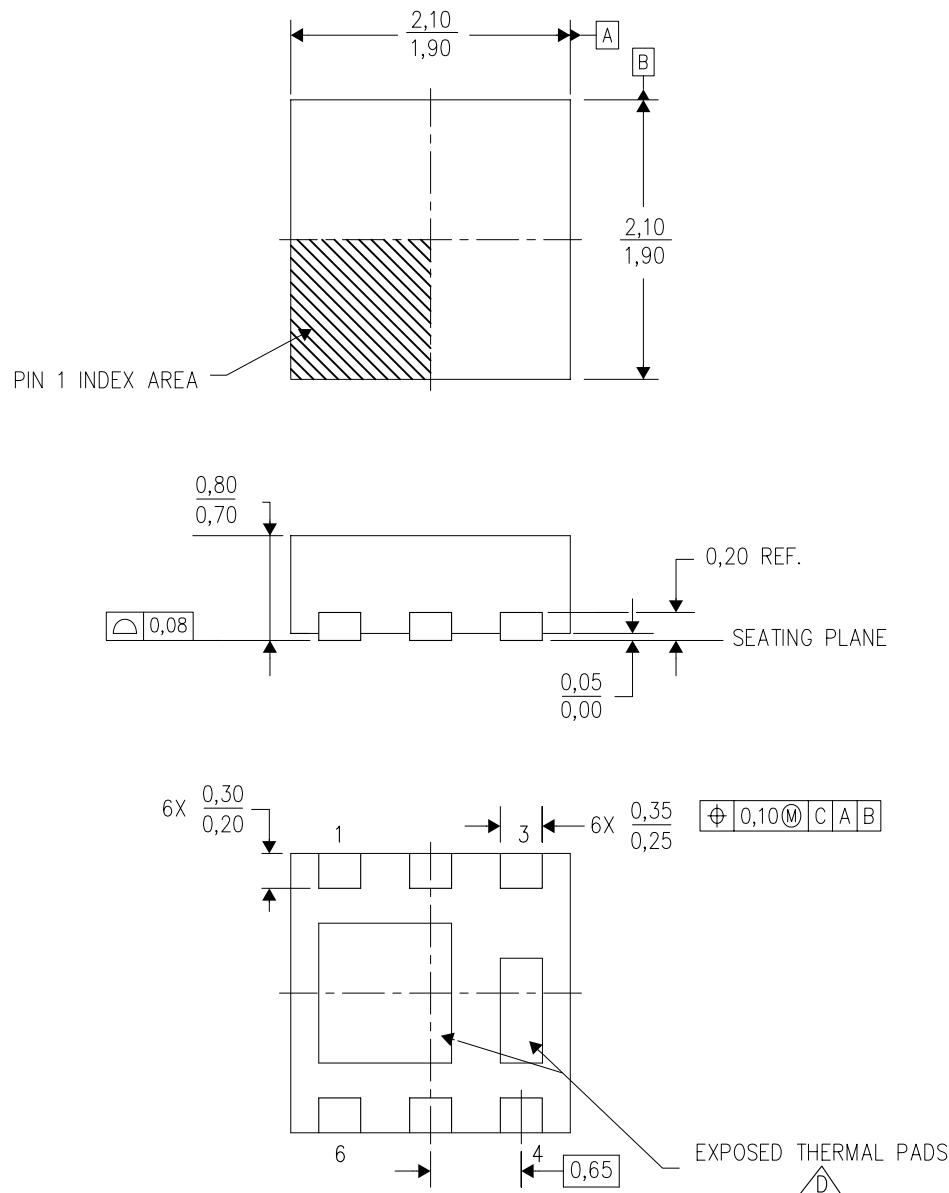

4210192/B 01/10


- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Small Outline No-Lead (SON) package configuration.
 -  D. The package thermal pads must be soldered to the board for thermal and mechanical performance.

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, Quad Flatpack No-Lead Logic Packages, Texas Instruments Literature No. SCBA017. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

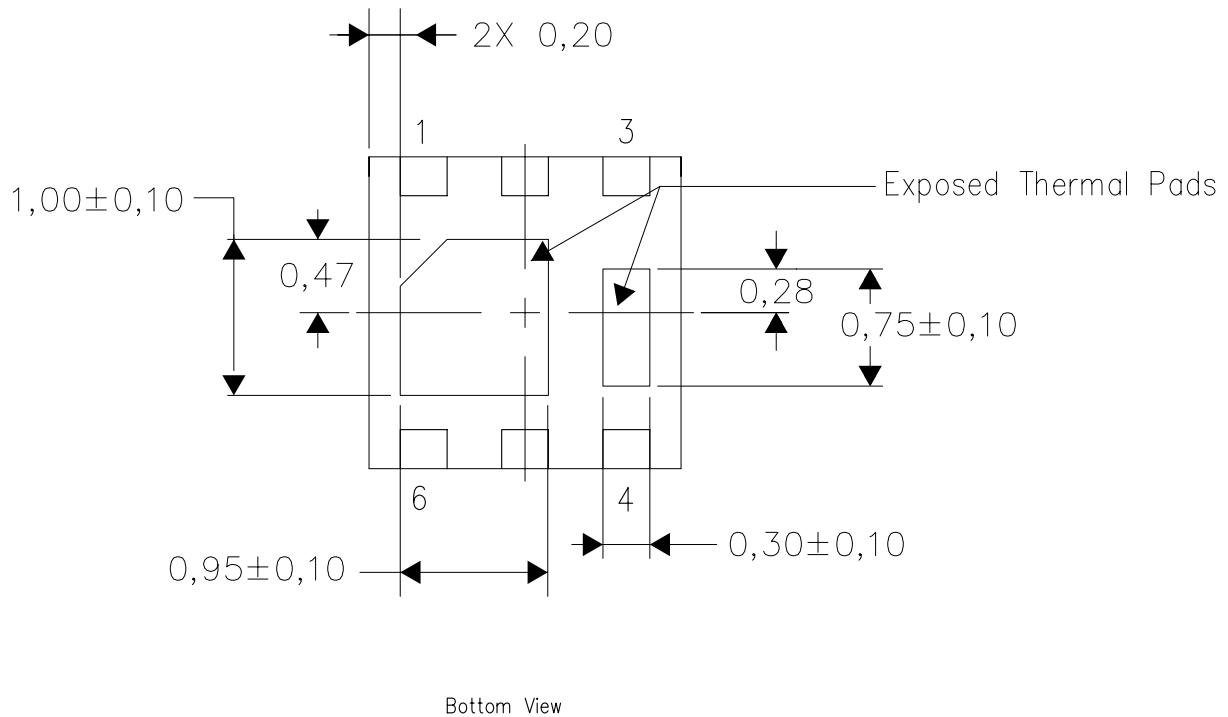

NOTE: All linear dimensions are in millimeters

Exposed Thermal Pad Dimensions

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated