Paving the way to self-driving cars with advanced driver assistance systems

TEXAS INSTRUMENTS

Hannes Estl Worldwide Systems Marketing for Advanced Driver Assistance Systems (ADAS), Texas Instruments

Recent publicity has attracted the public eye to the development of automated vehicles, especially Google's experimental cars that have logged thousands of self-driven miles with minimal help from human drivers.

These events are truly impressive, and in the long term will help revolutionize vehicle operation and our experience of driving. But the excitement about self-driving cars can make it easy to overlook numerous short-term developments by automotive manufacturers that are equally important in transforming the act of driving. Collectively known as Advanced Driver Assistance Systems (ADAS), these developments are designed to make cars safer, and their gradual introduction is already improving road safety. In addition, ADAS features represent an evolution in vehicle sensing, intelligence and control that will ultimately lead to self-driving cars.

ADAS technologies exist at different levels of active assistance and are being introduced in overlapping stages. Driver information systems, such as simple rear-view cameras, surround-view displays, and blind spot and lane departure warnings, provide information but leave the driver in full control at all times. Partially autonomous systems, such as lanekeep assistance and active cruise control, enable the vehicle to control itself briefly in carefully defined situations, but with the driver ready to override automatic control at all times. Highly autonomous systems, including automatic parking valet or impaired driver monitoring and override, will take full control of the vehicle at specific times. These higher levels of assistance employ the technologies used in the more basic levels, paving the way to self-driving, fully autonomous cars. At this level, the car can operate on its own, with or without someone in the driver's seat.

Volume production of automobiles with fully autonomous control is probably a decade away at this time, although as today's experiments demonstrate, the essential technology for selfdriving cars already exists. However, advanced electronic systems take up much of the space in automated test vehicles and are far more expensive than the cars themselves. To make self-driving feasible for vehicles in series production, the technology will have to be commercialized and made smaller, more light-weight and affordable, a process that can only be accomplished gradually over a period of years. Moreover, there are legal and social hurdles to overcome, which will take time. Clearly, the development, introduction and conversion of the fleet of cars on the road to selfdriving will be an evolutionary process that spans a number of automotive generations.

ADAS by its nature perfects different aspects of automated control, at first in independent subsystems, then with increasing levels of system integration, until ultimately the vehicle can drive itself. Evolving these various assistance functions is the job of automotive manufacturers, who look to semiconductor suppliers like Texas Instruments (TI) for innovative technology and solutions. Because ADAS technology is changing rapidly, auto makers need solutions that provide extra performance for system growth, and the flexibility to integrate new features with minimal design changes. ADAS and other automotive systems also pose unusual challenges for manufacturing components, including the need to operate at extreme temperatures, satisfy higher quality, reliability and safety standards and meet stringent cost targets. With its extensive experience in creating products for automotive electronics, TI can help ADAS developers by offering optimized, complete solutions that help simplify design and minimize component counts.

ADAS adoption status, challenges

As presented earlier, some ADAS features exist in cars today, and others are in development for upcoming models. Information and warning systems have appeared for several years now, evolving into the basic assistance capabilities that are now becoming common as well. For example, many recent models have features that help in backing up. Ultrasound and cameras can extend the driver's perception, and the car may brake automatically if something suddenly appears behind the car. The camera and ultrasound look behind the car while it is in reverse. Similarly, many drivers can now rely on autonomous acceleration and steering through a combination of front cameras and radar to keep the car in the center of its lane and cruise with traffic, even when speeds are continually changing. Some cars combine ADAS informational features such as

panoramic or surround view with the infotainment system to provide owners with a new degree of "infotainment." Early systems have been introduced with interpretive capabilities for, say, reading street signs or detecting objects around the car, and buyers will see more options in upcoming years.

Following a familiar pattern, features like these appear initially in high-end models, then migrate to midrange vehicles and eventually become available on all new cars. Where safety is concerned, insurance companies, regulatory bodies and legislatures normally become involved, accelerating phase-ins through favorable premiums and legal mandates. In some cases, legislation will be essential to resolve guestions of liability and also change existing requirements. For instance, today cameras and interior displays could replace external rear-view mirrors, not only enhancing safety by eliminating the treacherous blind spot, but also streamlining the car's profile for improved gas mileage and reduced carbon emissions. However, since existing safety standards often mandate car mirrors, regulations must be changed to permit these improved replacements. The first changes of the legal framework to allow cameras instead of side view mirrors-called camera monitoring systems-have already been rolled out in a few countries. The European NCAP system gives star ratings, for example, in blind-spot monitoring and the U.S. NHTSA has mandated that all new vehicles must have rear view cameras by 2018.

Security is also a concern as cars begin to communicate with each other and with installations along the roadway. However important it may be for automated vehicles to establish these communications, they also will need protection from malicious intrusion. These issues are not technically insurmountable, but they also involve legal and social adaptations that cannot happen overnight, and functional safety standards that auto manufacturers must adhere to will need to be established. Manufacturers will need to rely on semiconductor and equipment providers to produce parts that auto manufacturers can use to get their end products easily and quickly certified and into market.

Evolving ADAS features

The chart below outlines are some important ADAS innovations that exist or are in development; however, the field continues to evolve as new ideas emerge. Each level of autonomy listed feeds into the subsequent ones. That is, information systems may be passive, simply offering warnings to the driver, but they are also essential elements in all forms of autonomous function. Similarly, basic active operations will later integrate into advanced control and fully automated operation. (These levels roughly correspond to the National Highway Traffic Safety Administration's five-tier classification of vehicle automation which distinguishes some of its basic levels of automation by how many of a car's functions are involved.)

Information and warning

- Side and rear cameras with driver displays
- Back-up assistance
- Warning of oncoming cross-traffic
- Ultrasound sensing of areas in front and behind the car obstructed from driver view
- Traffic sign recognition
- Detection of lane markings
- Blind spot warning
- Night vision
- Ranging of objects ahead in conditions
 of poor visibility
- Vehicle-to-vehicle and vehicle-toinfrastructure communication
- Dynamic display image of the entire car and surrounding space
- In-cabin monitoring and warning to a distracted driver

Function specific automation

- Lane keep assistance to stay in the center of the lane
- Active cruise control for changing traffic conditions
- Collision avoidance by automatic braking
- Automated emergency brake
- Intelligent head beam assistance that illuminates curves ahead or prevents blinding of other traffic participants

Combined function automation

- Adaptive cruise control with lane centering
- Traffic jam assist

Limited self driving automation

- Automated parking/valet parking
- Highway auto pilot

Full self driving automation

Technical requirements for ADAS evolution

The evolution of ADAS technology involves several areas of innovation. Two important related trends include shrinking individual components such as sensors, cameras and electronics, and integrating dedicated functions into more comprehensive systems. These trends are complementary because smaller, less expensive components are needed to build larger systems affordably. For example, the same front camera that serves for lane-keep assistance can also provide information to detect objects in front of the car, read traffic signs or apply the brakes to avoid a crash. However, performing more complex ADAS functions requires not only input from more cameras and from other sensors such as ultrasound, LIDAR and radar, but also the fusion of data from those different sensor elements. Fusion also enables overcoming the drawbacks of individual sensor solutions and can provide some level of redundancy.

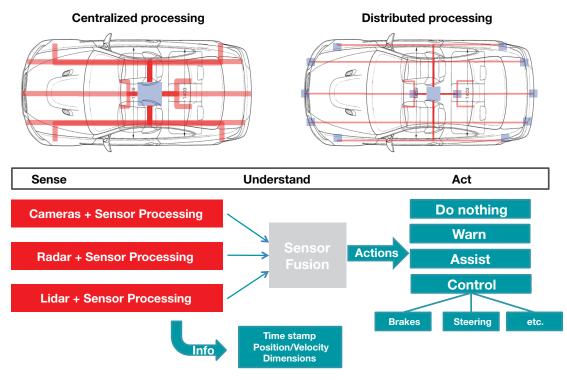


Figure 1. Sensor fusion technology

More sensors and more cameras with higher resolution all translate into requirements for highbandwidth communications and high-performance processing. Currently, different networking standards and topologies are used for ADAS. Whatever the ultimate standards become, it will be crucial that few wires are used to minimize weight and installation time. Latency must also be low to ensure efficient delivery of critical data. Optimized networking that allows video and other data, control signals and even power over a single wire, significantly reduces requirements for weight and connector size, thus reducing space in the modules themselves, as well as the weight of the wiring harness.

Video processing is another area of ADAS advancement, forming the bulk of the work because of the massive amount of pixel data that cameras produce. Initially, the system has to filter and condition the succession of video images, then identify areas of interest. Next, the system has to recognize items such as stop signs, pedestrians and other vehicles, and then decide what to do. Each of these time-critical tasks serves to narrow the data stream while increasing the algorithm's complexity. As a result, the system requires heterogeneous processing, ranging from dedicated video signal processing hardware for the raw data input, through programmable signal processing for object scanning and recognition, to a highperformance microprocessor for decision-making that affects vehicle operation. Image processing requires that as many of these heterogeneous processing elements be together as possible, along with the fast communication interfaces that supply camera data to the processor.

Besides flexible communications and heterogeneous processing, ADAS systems rely on integrated, adaptable power management. Automotive voltages vary over a wider range than do those of most electronic systems, and the operating environment can be extremely stressful in terms of temperature range, vibration and contamination. Power management solutions are especially important, not only because they supply reliable power for the operation of other devices, but also because they offer important protections that help prevent damage to systems. Robust power management is all but invisible to users, but system developers know that it is absolutely essential in the evolution of ADAS technology.

Providing solutions for ADAS requirements

ADAS system developers can rely on TI to offer solutions for their technical requirements. Given the needs of ADAS technology, developers require innovative solutions that offer affordability, flexibility to adapt to changes, reliability to meet the extreme conditions of automotive operation, and sufficient performance for future growth. Add to these advanced integration and packaging capabilities with both analog and digital functions, in-depth design support, and reliable supply in the regions where auto makers operate. Given these requirements and the exacting standards imposed on automotive suppliers, TI is well poised to deliver the full range of products that auto makers rely on for ADAS innovation and development.

The most complex of the specialized products required is the high-performance application processor at the heart of ADAS camera-based sensor and fusion, as well as some radar-based, features. Called the TDAxx system-on-chip, this solution integrates a wide range of functions to perform its heterogeneous tasks effectively. It was designed specifically for advanced vision processing and control and optimized to achieve the best balance among performance, power consumption and cost-effectiveness (Figure 2). The TDA2x enables high-end ADAS video systems, while the TDA3x is targeted at entry-level and space-constrained systems.

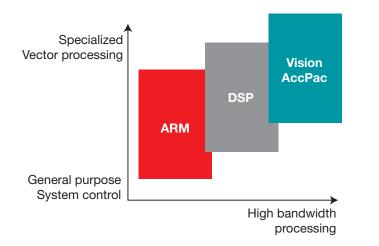


Figure 2. As complexity increase, specialized vision processing maximizes performance and power efficiency.

These products integrate a general-purpose dual-Cortex[™]-A15 RISC processor, dual C66x DSPs, and a programmable Vision AccelerationPac. One or more specialized hardware Embedded Vision Engines (EVEs) in the Vision AccelerationPac enables it to deliver up to eight times the computational performance of the RISC per unit of power. This frees up the DSPs and RISC cores to handle midand higher-level algorithms specific to the ADAS task. TI's innovations incude a Vision Software Development Kit (SDK) to enable rapid algorithm prototyping and fast creation of different data flows involving video capture, video preprocessing, video analytics algorithms and video display.

TI fully integrated set of peripherals into the TDAxx solution to simplify design and minimize space, thus facilitating sensor fusion (Figure 2). Communication interfaces, especially for camera-based systems like surround view and back-up camera, benefit from TI's latest generation FPD-Link III SerDes family, which helps reduce the effort to connect remote ADAS satellites to central processing modules to a single coaxial cable. Reduced wiring effort and smaller modules due to smaller connectors and highly integrated components help ensure that the evergrowing number of sensor modules for ADAS is not burdening new cars with high extra cost and weight. The ongoing evolution of networks in automotive systems, such as Gigabit Ethernet for automotive, will demand in-depth expertise in developing solutions for various types of communication.

Heterogeneous processors function with different voltage levels in the same device, and external devices may have different voltages requirements as well. Power management ICs must be able to supply steady, reliable voltages from the car's variable battery power while protecting against power surges and voltage transients. TI's power management advancements and solutions allow automotive electronics developers to select the appropriate power management devices for their ADAS systems. The company's high-performance processing, communications and power management products are supported by long-term experience in creating solutions for the automotive industry.

ADAS evolution is driving an automotive revolution

While self-driving cars are still in development, advanced driver assistance is with us today and rapidly increasing in importance. Current models are starting to move beyond information and warning systems. However, the changes will come incrementally, as ADAS features become smaller, easier to integrate, and more affordable. Moreover, the technology can't move forward on its own: there must be accompanying legal and social advances. All of these factors are leading us toward cars that operate on their own, and all are necessary for the ultimate success of fully automated vehicles. TI is driving innovation to reduce the size, weight and expense of ADAS features while adding ever-greater functionality, often by integrating previously separate functions into the same silicon or package. High-performance, heterogeneous video processing, flexible communication interfaces, and efficient, protective power management are three of the most important areas of advancement. TI advancements are also enabling extensive integration and packaging capabilities for both analog and digital technologies, and in-depth design and manufacturing support proven through long-term relations with key players in the automotive industry. Together these advancements will push ADAS forward and will eventually enable automated vehicles.

For more information:

- Learn about the <u>TDA2xx SoC</u> and <u>FPD-Link III family</u>
- Check out our <u>ADAS applications</u> and <u>TI designs</u>
- Read our related white papers:
 - Making cars safer through technology innovation
 - Scalable electronics driving autonomous vehicles

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

The platform bar is a trademark of Texas Instruments. All other trademarks are the property of their respective owners.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2020, Texas Instruments Incorporated